
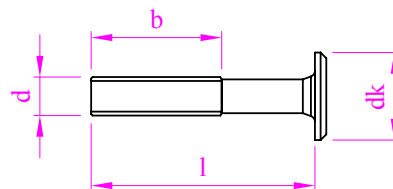


Swedfast



Skruv MP6S elförzinkad med lågkullrigt huvud

Material Stål 4.8
 Ytbehandling Elförzinkad (Cr3+) enligt ISO 9227 klass 3
 Övrigt Insexgrepp, gänglängd min 30 mm
 Förpackning Bulk

Gängdiameter d M 6
 Huvuddiameter dk 14,5
 Nyckelvidd s 4

Artikelnummer	Dim d x l	Förp stl	Artikelnummer	Dim d x l	Förp stl
730060001000001	M 6x10	1500			
730060001500001	M 6x15	1500			
730060002000001	M 6x20	1500			
730060002500001	M 6x25	1500			
730060003000001	M 6x30	1500			
730060003500001	M 6x35	1500			
730060004000001	M 6x40	1500			
730060004500001	M 6x45	1500			
730060005000001	M 6x50	1000			
730060005500001	M 6x55	1000			
730060006000001	M 6x60	1000			
730060006500001	M 6x65	1000			
730060007000001	M 6x70	1000			
730060007500001	M 6x75	1000			
730060008000001	M 6x80	1000			
730060008500001	M 6x85	1000			
730060009000001	M 6x90	500			
730060009500001	M 6x95	500			
730060010000001	M 6x100	500			
730060011000001	M 6x110	500			